



## Shaw LED Wrap Light SHAL Series

### Features

Modern LED wrap can be used in various applications including corridors, kitchens and public spaces. Uses energy saving LED providing 4200 or 2600 lumens (4000K).

### Construction

Housing is die-formed of 22-gauge steel. Mounting holes are included. Power supply connections are made inside the junction box (not included). Plastic molded endcaps.

### Finish

Housing is finished in lighting grade white baked gloss enamel paint.

### Diffuser

Frosted white acrylic diffuser.

### Electrical

Direct wired for 120-277 VAC operation, 60 Hz.  
Low voltage LED driver.

### LED

Integrated LED modules capable of producing:

23" - 25W = 2600 lumens

47" - 43W = 4200 lumens

4000K (CCT), Rated for 50,000 Hrs., 80 CRI.


### Certification:

cETLus listed for damp locations.

### Limited Warranty:

This product is free from defective materials and workmanship for 5 years from original date of purchase and that under appropriate application, installation, operating conditions and when operated at rated voltage, will be free from failure.

Specifications and dimensions subject to change without notice.

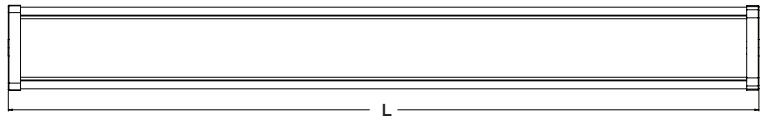

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		



### Ordering Information:

White	LED	Source Lumens	CCT	L	W	H
SHAL052220L40MV	25W	2600	4000K	23-3/4"	5-3/8"	2-1/2"
SHAL054840L40MV	43W	4200	4000K	47-3/8"	5-3/8"	2-1/2"