

05	-	-	-
04	-	-	-
03	-	-	-
02	-	-	-
01	-	FOR REVIEW	Leo
#	DATE	DESCRIPTION	INITIAL

**HUDSON VALLEY
LIGHTING GROUP**

EXCLUSIVE COPYRIGHT BY HUDSON VALLEY LIGHTING GROUP
NOT TO BE MANUFACTURED WITHOUT PERMISSION OF
HUDSON VALLEY LIGHTING GROUP.
FIXTURE MUST BE UL C-UL LISTED.

SOCKET	BULB	MAX WATT	
E26	A19	60	
WIDTH	EXTEND	HEIGHT	TCD
-	-	-	-

FINISH
AGB, OB, PN

MATERIAL
BRASS, STEEL

DESCRIPTION
1 LT WALL SCNCE


CATALOG NO.
-

JOB NAME / WORKING NAME	2ND CATEGORY
-	NA

ITEM NUMBER
HVL-

LISTING
SUITABLE FOR DAMP LOCATION

DATE	SCALE	SHEET SIZE	INITIAL
-	1:1	24" X 42"	Leo

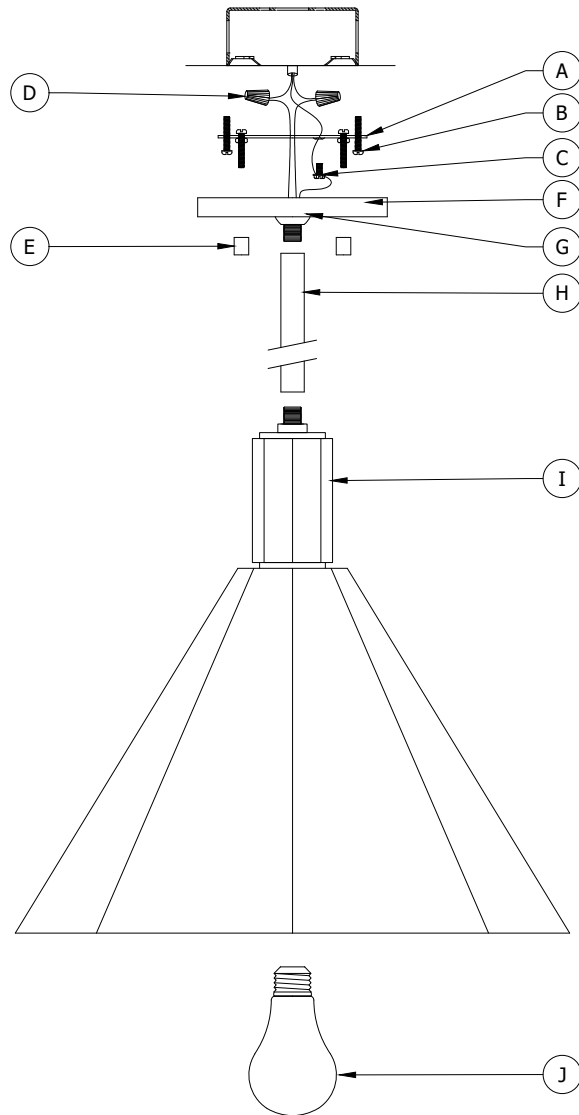

FIXTURE INSTALLATION

1. Feed the wire through the STEM KIT (H) and twist tightly onto the FIXTURE ASSEMBLY (I). Keep adding additional stems until you desired hanging height is met.
2. Slide in CANOPY (F) onto the STEM KIT (H), and thread the SWIVEL (G) onto the top end of the STEM KIT (H).
3. Pull the wire out from the junction box, and install the MOUNTING PLATE (A) onto the junction box using the MOUNTING SCREWS (B). This fixture is designed to be mounted on standard round or octagon junction box. The junction box must be securely mounted to the structure of the building.
4. Trim off the excess wire to a minimum 6" beyond the STEM and strip each wire $\frac{5}{8}$ ".
5. Attach the Ground wire (Green) to the ground inside the outlet box (Generally green or bar copper wire) or the GROUND SCREW (C) on the MOUNTING PLATE (A). NEVER CONNECT GROUND WIRE TO "HOT" WIRE! FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!
6. Connect the white fixture lead to the neutral (Generally white) wire in the outlet box. Fasten the wires together with an approved fastener (WIRE NUT) (D). Starting 1" below the fastener, tightly wrap the connection with electrical tape so that the connections seals the end of the fastener. MAKE SURE THERE ARE NO EXPOSED WIRE OF STRANDS THAT COULD CAUSE A DANGEROUS SHORT CIRCUIT!
7. Connect the black fixture leads to the hot (Generally black) wire in the outlet box. Fasten the joined wires same as previous step. NEVER REVERSE HOT AND NEUTRAL WIRES. FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!
8. Push the wires back into the junction box. Lift up the CANOPY (F) up to the ceiling, and secure with the BOLT NUT (E).
9. Screw the BULB (J) up into the SOCKET of the fixture. THIS FIXTURE IS RATED FOR 60 WATT TYPE A LAMP. DO NOT EXCEED THE RECOMMENDED WATTAGE!
10. Restore power to the outlet at the breaker or fuse box.

PART(S)	REPLACEMENT PART	NUMBER
A,B,C,D,E	HARDWARE KIT	HDW-F8308
F,G	CANOPY ASSEMBLY	CAS-F8315
H	STEM KIT	STM-Z11600-SET