### Installation manual for

1712G79LAB

Dimensions: L79"\*\\35"\*\\35" L9

Collection : CAVOLI

Bulb Type : E26 bulb not included

Lamp Frame Weight: 9.7 LBS Total Weight: 13 LBS



Thank you for choosing our product(s).

Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers. Please find the enclosed detailed instruction and read carefully for proper installation. If you have any questions,

1-888-388-3390 (L) C (L) US

our professional customer service team is committed to assisting you, please call our toll free HOTLINE AT:

#### SAFETY

WARNING: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF BY EITHER REMOVING THE FUSE OR TURN OFF THE CIRCUIT BREAKER.

#### AUTION

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit: 110 130V/60Hz.
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated.
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.


### UNPACK THE PACKAGE

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions, please call our Customer Service department at 1-888-388-3390. Please have model number (at the front page), where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

(2)

(8)

## Frame Assembly Diagram

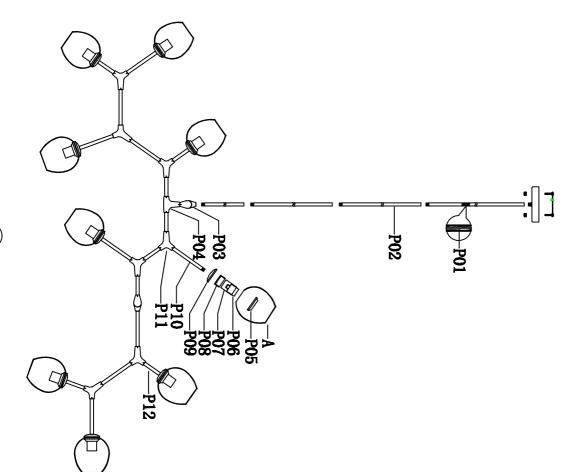

1712G79 L79"\*\35"\*\35" L9

Step 1
Please use the parts list to ensure you are not missing any parts.

1712679
PARTS LIST

P04	P03	P02	P01	ZG	ZF	ZE	ZD	ZC	ZB	ZA	Part
$\leq$		<b>\times</b>	1	W	\	•		Î			Picture
"T" joint	Movable joint	Metal Rod DO.53"* L6"+12"+12"+16"	Power Cord 59"/SPT-1-18# Black	junction caps	ground wire	Nut	Ceiling Plate (D5. 9"*H1")	Crossbar Screws	Crossbar D4"	Junction box not included	Description
		ROD4013FB						Parts number			
1	2	1	1	2	1	2	1	2	1	1	Qty
											Qty Check 1
											list

(2)

**2** 

### 1712G79 L79"\*\35"\*\35" L9

	A	P12	P11	P10	P09	P08	P07	P06	P05	Part
	00		$\langle \rangle$					₽		Picture
	Glass	D0. 53"*L3. 15" Metal Rod	"Y" joint	D0.53"*L6" Metal Rod	Metal plate	Metal joint	D1.5"*H2.2" lamp cup	E26 lampholder	Metal ring	Description
	GLASS1712CL									Parts number
	9	တ	7	6	6	9	9	9	9	Qty
										Check list

1712G79 L79"\*\\35"\\*\135" L9


						Part
						Picture
						Description
						Parts number
						Qty
						Check list

**%** 

1712G79 L79"\*\35"\*\35" L9


Step 2


Canopy Installation Instruction

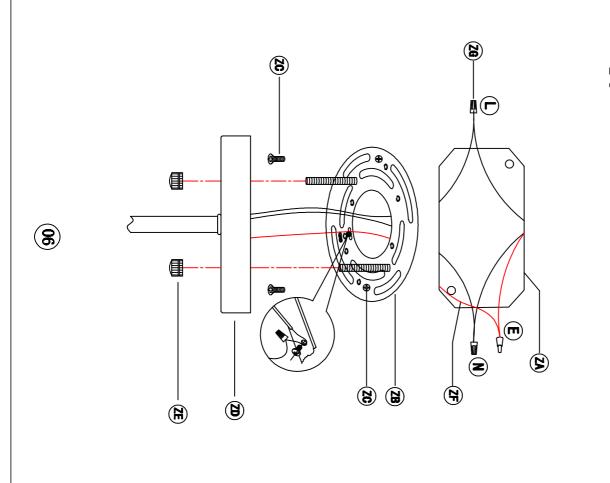

Step 3

# Frame Assembly Diagram





dressing the fixture. IMPORTANT: Test sockets with bulb before

- 1. Attach the Crossbar (ZB) to the Junction Box (ZA) using the two crossbar screws (ZC) which are not supplied and should already be in your
- 2. Be sure when connecting the wire use electrician approved junction caps (ZG).

-03

<u>8</u>

- 3. Stow the excess wire in the junction box(ZA).
- 4. Mounting screws (ZE), attach the fixture to the ceiling.

(2)

**8** 

# Frame Assembly Instructions

#### Installation:


off until installation is complete. Please number. Please proceed in a numerical order. note that each part has been assigned a the power supply is turned off and remains Before you proceed to install, make sure that Please read all instructions carefully.

- 1. Fix the iron tube (02), (03), (04), (05) and ceiling plate (06) on the movable joint (01).
- Hang the canopy parts on the Ceiling Plate.
- က က Fasten the fixture loop to hang the whole fixture.

1712G79 L79"\*\\35"\\*\35" L9

Step 4

# Crystal Dressing Diagram

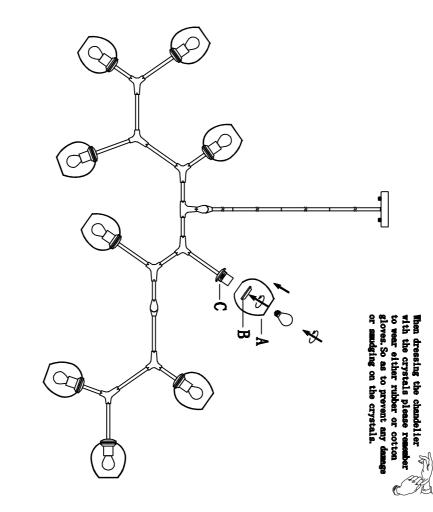

- 1. Install the glass(A) to the lamp holder(C) and fix it well by metal ring(B).
- 2. Screw the Bulb on the Lamp Holder.

8

# Congratulations!

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

If you require any additional assistance, please contact us at 1-888-388-3390.

Thank you.

Cleaning and Maintenance of Chandelier Frame
The finish on our chandelier frames and fixture
frames is protected by a durable coating of
lacquer. To clean, use a clean soft, dry cloth. Do
not use any metal polishes, cleaners, abrasives
or any substance which could remove the
protective finish. Failure to follow these
instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals
Wet a soft cotton fabric in clean warm water and
wipe gently, then polish with a dry soft cotton
fabric

Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased or contact us at the address shown on the reverse side. For ease of ordering, you may use the original crystal trimming instructions provided with this product and circle the items you wish to order, indicating the quantity by writing the number needed adjacent to the circle and faxing it to our customer service department at 215-423-8882. You will be contacted with prices prior toshipment. All orders must be pre-paid.

# Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of two (2) years from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department at the address and phone number shown below. A written return authorization form will be sent to you with specific instructions.

CUSTOMER SERVICE DEPARTMENT

500-550 E. Erie Avenue Philadelphia, PA 19134

Tel: 215-423-8880

Fax: 215-423-8882

# Returns and Conditions of Warranty

sale of our products. assume for us, any liability in connection with the authorize nor permit any other person or firm to other obligations or liabilities. Further, we neither resulting from a failure to follow the recommended a pre-authorized facility. We will not be responsible otherwise modified, nor shall it apply to any product apply to any product that has been changed, altered or shipping charges pre-paid. We reseserve the right to customer service department at the address on the is issued in lieu of any and all other guaranteed or maintenance or installation procedures. This guarantee installation or wiring by others, nor for damages responsible for damage incurred during improper inappropriate handling. Also, we will not be held nor for crystal parts or metal frame part that have for any breakage or damages incurred during transit, that has been repaired or altered by anyone other than written return merchandise authorization and return reverse side. Returns will only be accepted with a Returns must be pre-authorized by contacting our warrantee, whether written or implied and any and all the nature of any defect. This guarantee shall not inspect all returned merchandise to fully determine been subject to misuse, negligence, accident or