






Installation manual for 3503D40C/G

Dimensions : L40.9" W18.1" H10.9"
Collection : Monroe
Bulb Type : LED PCB 72W 4000K/3000K
Lamp Weight : 37.2 LBS
Total Weight : 42 LBS



Thank you for choosing our product(s).
Our Company is actively involved in every step of the production.
Our product(s) are designed to be utilized for every application that graces your home or business.
We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.
Please find the enclosed detailed instructions and read carefully for proper installation. If you have any questions, our professional customer service team is committed to assisting you, please call our toll free HOTLINE AT:

1-888-388-3390   US



3503D40 L40.9" W18.1" H10.9"

SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF. BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.

CAUTION

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit : 110 - 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.


Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions, please call our Customer Service department at 1-888-388-3390. Please have model number(at the front page), where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

①

3503D40 L40.9" W18.1" H10.9"

Frame Assembly Diagram

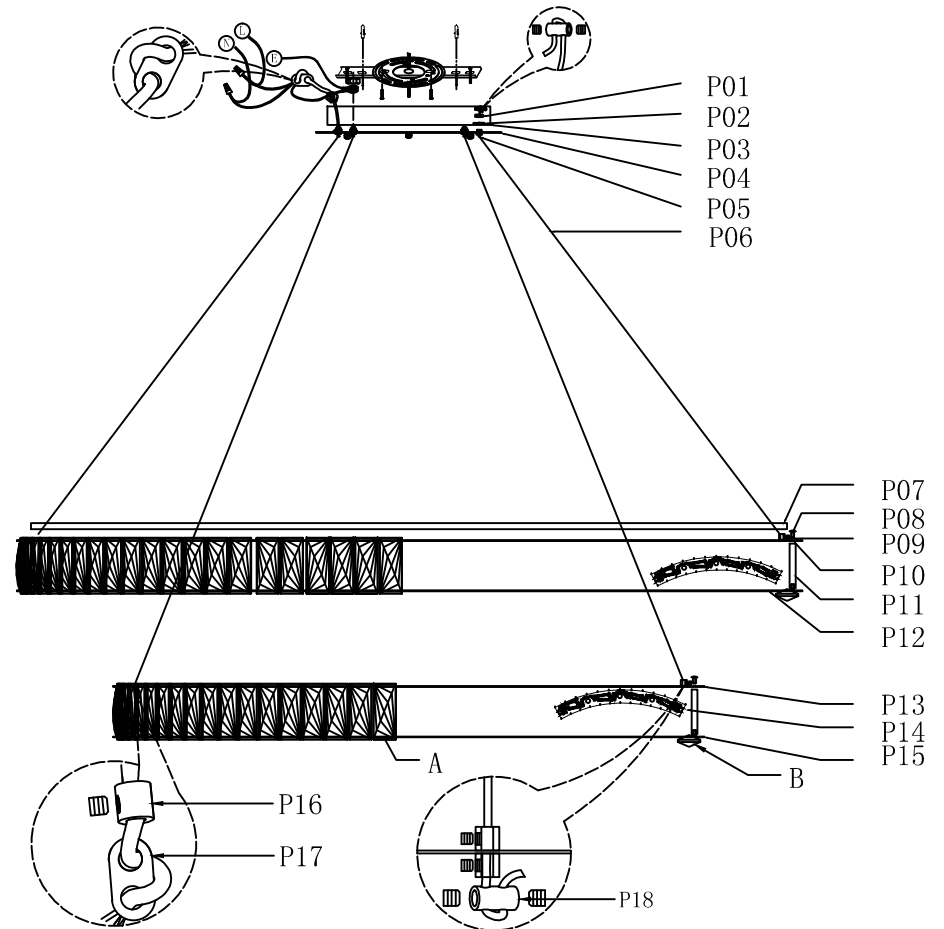













②

3503D40 L40.9" W18.1" H10.9"

Step 1














Please use the partslist to ensure you are not missing any parts.

3503D40 PARTS LIST

Part #	Picture	Description	Qty	Check list
ZA		bracket system	1	
ZB		M4*40 screw	4	
ZC		5/32*40 screw	2	
ZD		M5 screw cap	4	
ZE		plastic anchor screw	4	
ZF		junction caps	3	
P01		M12 nut	8	
P02		M12 metal pad	8	
P03		L8.7*W4.7*H1.5 canopy box	1	
P04		L9.8*W5.9 S.S plate	1	
P05		M12*28 wire adjuster	8	
P06		ssl 2*24#φ3.6mm*86.6" electric wire	1	
		ssl 2*24#φ3.6mm*74.8" electric wire	3	
		ssl 2*24#φ3.6mm*94.5" electric wire	1	
		ssl 2*24#φ3.6mm*82.7" electric wire	3	

03


3503D40 L40.9" W18.1" H10.9"

Part #	Picture	Description	Qty	Check list
P07		L40.1*W17.2 pipe ring	1	
P08		M4*10 screw	32	
P09		<8*H8 wire fixer	16	
P10		L40.9*W18.1 S.S ring	1	
P11		2.4 inch metal pipe	32	
P12		L40.9*W18.1 S.S ring	1	
P13		L31.1*W11.8 S.S ring	1	
P14		L200*H43-4W high voltage LED PCB	16	
P15		L31.1*W11.8 S.S ring	1	
P16		14*10*2.5mm	4	
P17		φ8*H18 wire fixer	12	
A		1.2*3 crystal	236	
B		1.2*1.2 crystal	96	

04

Step 2


Canopy Installation Instruction

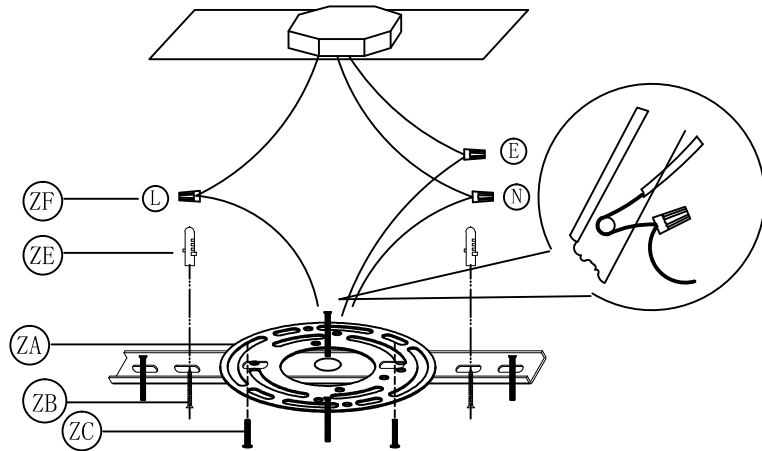

1. Drill two holes on the ceiling and put the plastic anchor screw(ZE) into the holes(If the wall is wood made, this step can be ignored);
2. Attach the Bracket (ZA) to the Junction Box with two screws(ZC).
3. Fix the bracket on the ceiling with screws(ZB)
4. Connect the wires with electrician approved junction caps(ZF).

Step 3

Frame Assembly Diagram

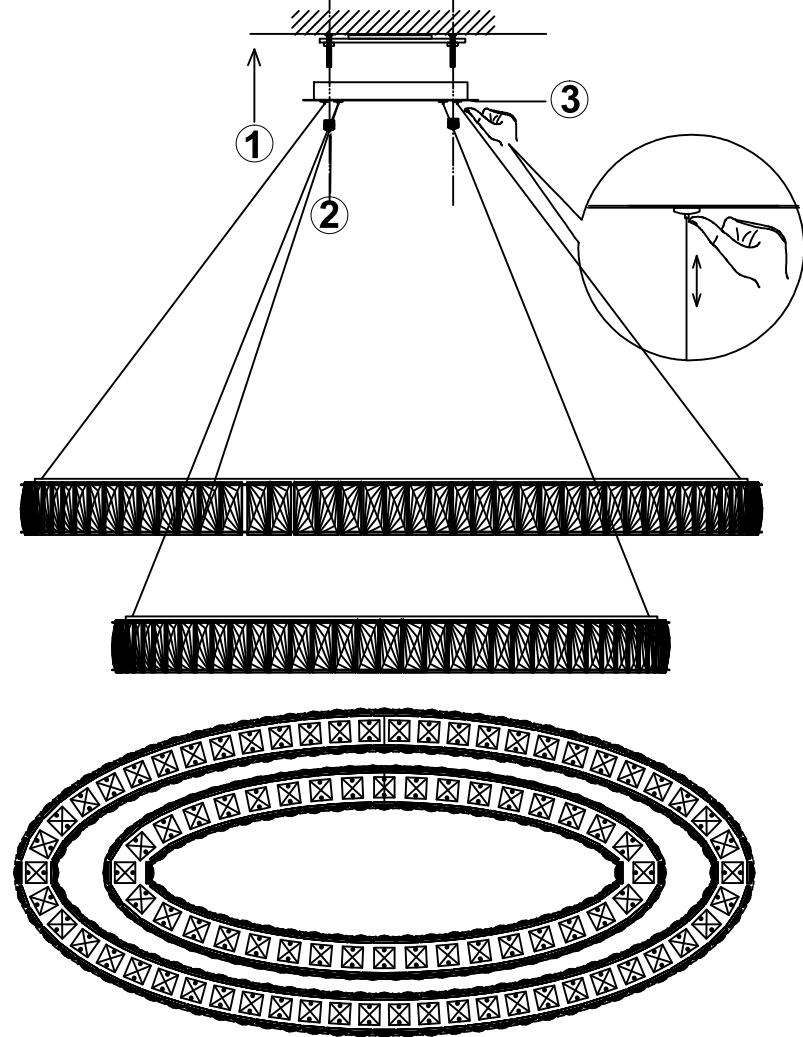

3503D40 L40.9" W18.1" H10.9"

Frame Assembly Instructions

Installation:

Please read all instructions carefully, before you proceed to install. Make sure that the power supply is turned off and remained off until the installation is completed.

Please note that each step has been assigned a number. Please proceed following the numerical order.

1. put the fixture on the bracket;
2. fix the fixture on the bracket with screw (ZD);
3. press down the metal pipe on the wire adjuster (P05), adjust the height of the lamp by push up or pull down the wire(P06).Release (P05), the wire length will be kept.

Congratulations!

You are now done installing your Elegant lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

If you require any additional assistance, please contact us at 1-888-388-3390.

Thank you!

07

3503D40 L40.9" W18.1" H10.9"

Cleaning and Maintenance Instruction

The frame and canopy surface is stainless polished. Please use a clean, soft and dry cloth to clean. Do not use any hard object or tools to scratch on the surface of the metal. Failure to follow these instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals

Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

To Order Replacement Parts

Please contact the store where the product was purchased or contact us at the address shown on the reverse side. For ease of ordering, you may use the original parts list, indicating the model number, part number and quantity and faxing it to our customer service department at 215-423-8882. You will be contacted with prices prior to shipment. All orders must be pre-paid.

08

3503D40 L40.9" W18.1" H10.9"

Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of two (2) years from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department at the address and phone number shown below. A written return authorization form will be sent to you with specific instructions.

CUSTOMER SERVICE DEPARTMENT
500-550 E. Erie Avenue
Philadelphia, PA 19134
Tel : 215-423-8880
Fax : 215-423-8882

3503D40 L40.9" W18.1" H10.9"

Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department at the address on the reverse side. Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reserve the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warrantee, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.