

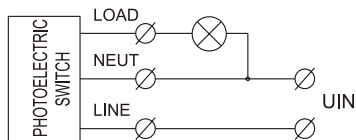


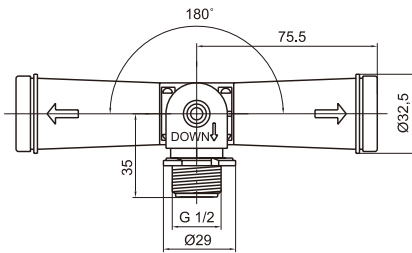

## LC-115

### Thermal Type Photocontrol (Swivel & Wire-in)

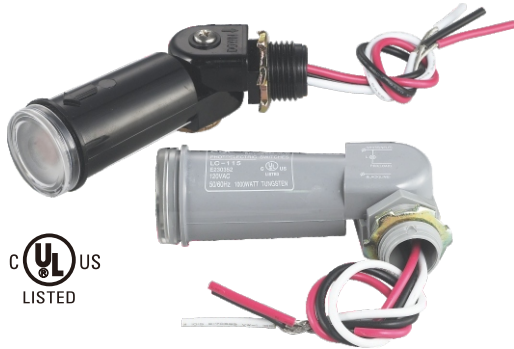

Circumrotatory 360, Vertically 180 adjustable

#### SPECIFICATIONS AND CHARACTERISTICS:

- ANSI C136.24 & UL773A Standard
- UL Listed, Reference No.: E230352
- Rated Voltage: 120VAC, 220VAC
- Turn-ON Light Level: 10-16 Lux
- Turn-OFF Light Level: <65 Lux
- Action time: 30-180 sec
- Operating Temperature: -40°C to +70°C
- Energy Consumption: Less than 1Watt (120V <0.7W)
- Electrical Life: >5000 cycles
- Sensor Type: CDS
- Housing: UV stabilized impact resistant polycarbonate (PC)
- Failure Mode: Fail ON
- Lead: 18AWG x 16cm (UL 1015, 105°C/600V)
- Load Rated: 50/60Hz

Code	Voltage	Tungsten (W)	Ballast (VA)
115H1	120V	1000	1100
115H2	220V	2000	1100