


A19LED102-6PK

CRI 80 3000K 450 Lumens Filament LED bulb

The high performance LED makes it an excellent choice for new construction or retrofit applications.



Performance

- LED bulb is designed to provide 15000 hours of life
- Energy-saving & Super bright, saving 75% energy compared
- ETL and FCC compliant, for use indoor only.

Construction

- IP20 Waterproof

Installation

- To ensure safety, please disconnect power before installation and changing Bulb.
- Size:Φ2.36" *H4"




Specifications

Category	Light Bulb	Individual Box Weight Per Unit (Lbs)	0.13
Shape	A19	Inner Package Length (Inch)	8.12
Bulb Base Type	E26	Inner Package Width (Inch)	5.44
Bulb Base Finish	Gold	Inner Package Height (Inch)	5.52
Color Temperature	3000K	Inner Package Weight Per Unit (Lbs)	1
Beam Angle	360°	Inner Package Quantity	6
Finish	Clear		
CRI	80		
Average Life (Hours)	15000		
Estimated Yearly Energy Cost (11 ¢ /Kwh)	0.54		
Life Based On 3Hrs/Day (Years)	13.7		
Product Length (Inch)	N/A	Lamp Type	LED filament
Product Width (Inch)	2.36	Bulb Shape	A Lamp
Product Height (Inch)	4	Dry/Wet/Damp	Dry
Product Extension (Inch)	N/A	Energy Star	NO
Product Weight Per Unit (Lbs)	0.07	Power Factor	0.8
Dimmable	Yes	Current	42mA
Watts	4.5	Lumen/Watt	100
Watt Equivalent	40	Warranty (Year)	2
Lumens	450	DLC (Yes/No)	No
Certification (UL/ETL/FCC)	ETL	Input Voltage	120V;60Hz
Individual Box Length (Inch)	2.56	Housing Material	Glass
Individual Box Width (Inch)	2.56	Lens	Clear Glass
Individual Box Height (Inch)	5.12	Led Type	San'an



A19LED102-6PK

CRI 80 3000K 450 Lumens LED Filament Bulb

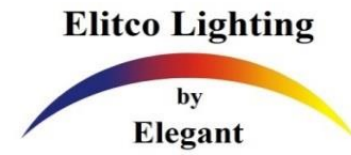


Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
		2000	1000	500	<=300	<=300	<=300	<=300	<=300
1.15	A	2000	1000	500	<=300	<=300	<=300	<=300	<=300
1.50	B		2000	1000	500	<=300	<=300	<=300	<=300
1.85	C			2000	1000	500	<=300	<=300	<=300
2.20	D				2000	1000	500	<=300	<=300
2.55	E					2000	1000	500	<=300

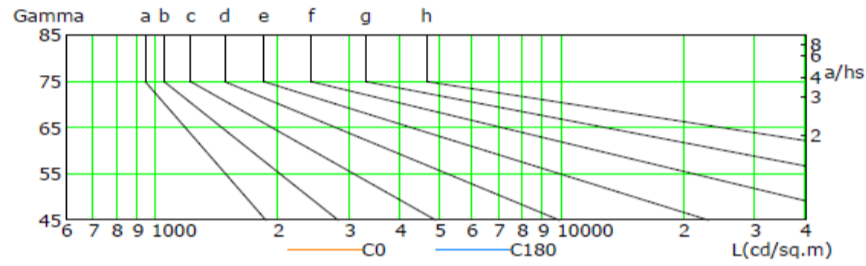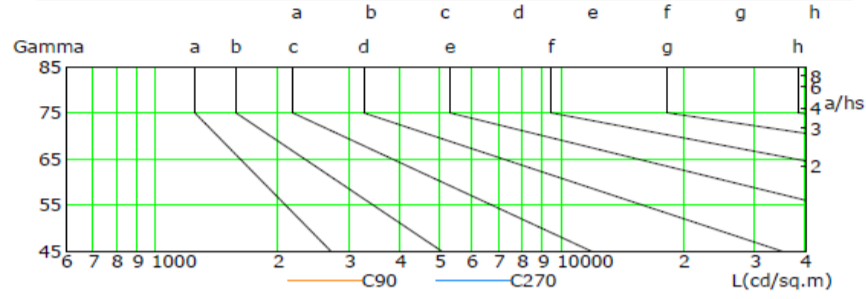


L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	29	33	36	39	41	43	45	46	46
C90	28	31	34	37	39	41	43	44	45
C180	31	34	38	40	43	45	46	47	48
C270	31	34	37	39	41	43	45	46	46

Luminous Intensity Distribution Curve

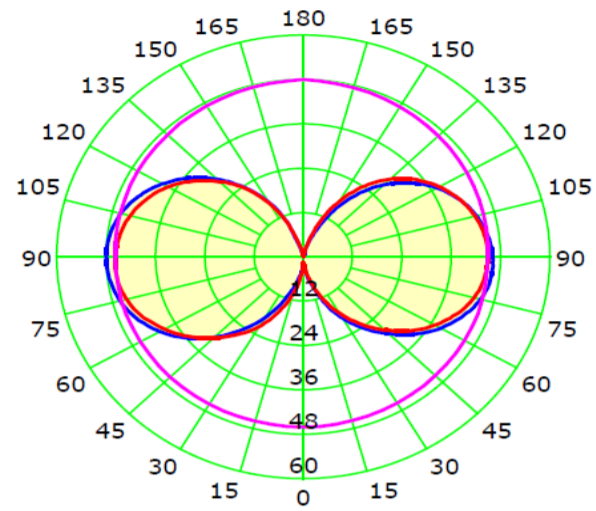

Average Diffuse Angle(50%): 285.3° Unit: cd
 — C0-C180 — C90-C270 — G90

The Average Illuminance Effective Figure

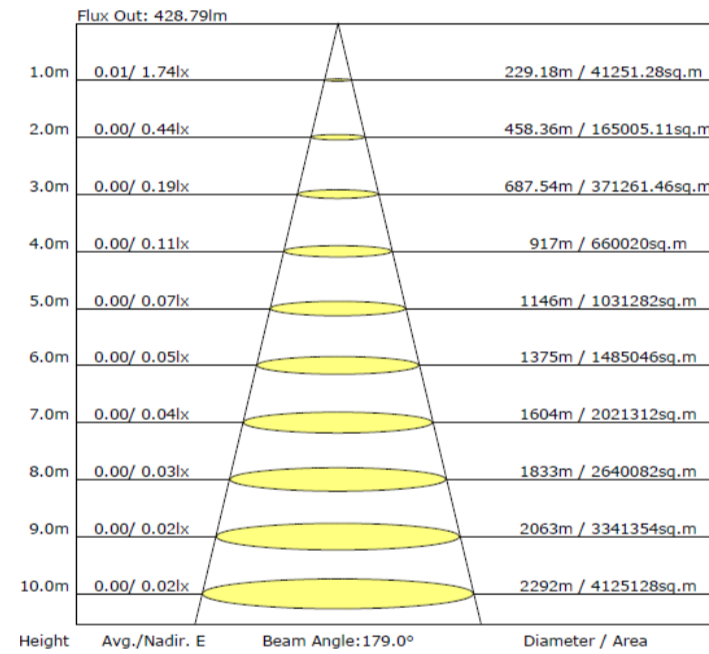

Dimmer Types

Brand	Model#
LEVITON	6672-1LW
LEVITON	6674-POW
LUTRON	S-600P-WH
LUTRON	MACL-153M-WH
LUTRON	DVCL-153P-WH
LUTRON	D-600PH-3CK
LUTRON	D-600PH-DK
LUTRON	D-600R