


**WINDPOINTE® SERIES**

**FP7500\*\*/FP7510MW  
5-Blade Traditional Model**

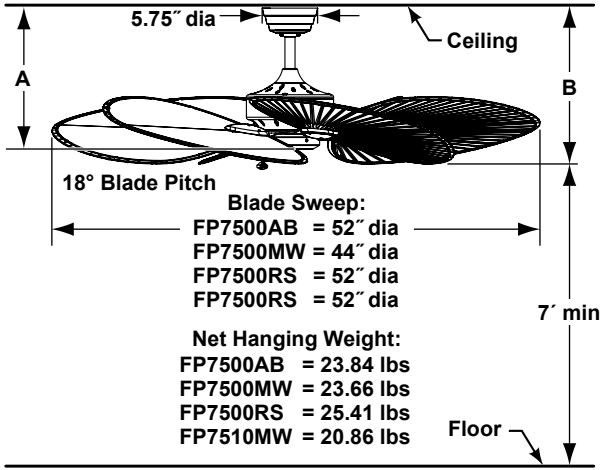

Available Finishes FP7500**	
AB	Antique Brass
MW	Matte white
RS	Rust (Damp)

Available Finish FP7510MW	
MW	Matte white

	A	B
Fan w/6" downrod	14.50"	14.00"
Fan w/12" downrod	20.50"	20.00"
Fan w/18" downrod	26.50"	26.00"
Fan w/24" downrod	32.50"	32.00"
Fan w/36" downrod	44.50"	44.00"
Fan w/48" downrod	56.50"	56.00"
Fan w/60" downrod	68.50"	68.00"
Fan w/72" downrod	80.50"	80.00"

FP7500AB Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	86	2633	63	0.37	42
Med	82	2337	68	0.34	34
Low	57	1420	86	0.23	17

FP7500MW Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	122	2812	67	0.37	42
Med	109	2501	73	0.33	35
Low	75	1600	96	0.23	17

FP7500RS Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	95	2551	60	0.37	42
Med	86	2272	65	0.34	35
Low	68	1175	71	0.23	17

FP7510MW Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	144	6145	87	0.37	71
Med	105	4473	121	0.33	37
Low	69	2991	199	0.23	15

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

188 x 25 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version is available.

**BLADES:**

A set of five blades is included.

**CONTROL OPTIONS:**

Optional CW1, CW1SW, CW2, CW5 and CWRL4 wall controls and CRL4WH and CRL8TS remote controls (with receiver units) are available—sold separately. Instructions are provided with each control.

**LIGHTING OPTIONS:**

Optional lighting fitters and light kits are available. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for lighting options.

**DOWNROD OPTIONS:**

Fan comes with 1" dia. x 4.5" long downrod. Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 30°. Optional close-to-ceiling kit is available as well-sold separately. Call your local dealer for more information.

**LOCATION USE:**

FP7500AB and FP7500MW are rated for dry locations only. FP7510MW and FP7500RS are rated for dry and damp locations.