




**GLIDEAIRE™**

**FPD8520\*\*  
52" Ceiling Fan**

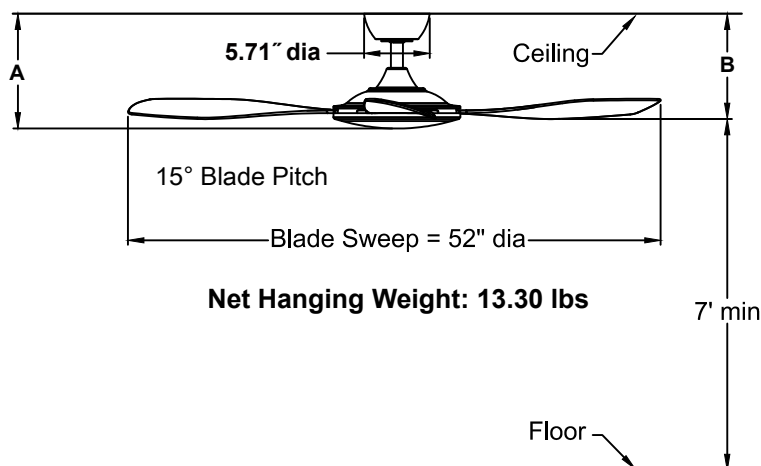

	A	B
Fan w/4.5" downrod	9.98"	9.15"
Fan w/12" downrod	17.48"	16.65"
Fan w/18" downrod	23.48"	22.65"
Fan w/24" downrod	29.48"	28.65"
Fan w/36" downrod	41.48"	40.65"
Fan w/48" downrod	53.48"	52.65"
Fan w/60" downrod	65.48"	64.65"
Fan w/72" downrod	77.48"	76.65"

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

158x15 sensorless DC motor is designed for optimal performance with this fan.

**BLADES:**

A set of three 22" composite blades is included.

**CONTROL OPTIONS:**

TR205D hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Optional TW206D wall control and WFR8520 WiFi receiver unit are available—sold separately. Instructions are provide with each control.

**DOWNROD OPTIONS:**

Fan comes with 1" dia. x 4.5" long downrod (DR1-4.5). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan must use 12" or longer downrod, and can be mounted on a sloped ceiling up to 19°. Most sloped ceiling in stallations require a downrod longer than the standard 6" downrod. Optional close-to-ceiling kit is available as well—sold separately. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Call technical supportfor more information.

**LOCATION USE:**

Fan is rated for dry and damp locations.

Available Finishes	
BNBN	Brushed Nickel with Brushed Nickel
BNBL	Brushed Nickel with Black
BL	Black with Black

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 <sup>th</sup> )	173	5538	215	0.36	26
Med (9 <sup>th</sup> )	105	3371	456	0.11	7
Low (1 <sup>th</sup> )	28	538	192	0.05	3

Energy Guide FTC			
Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
17	3746	5	218