

### Technology

- Frameless, 5/16-inch-thick Crystal Clear tempered glass.
- Self-closing mechanism offers superior feel and security against water leakage.
- Vertical handle complements the contemporary style.
- Ultra-low threshold creates easy entry and exit to the showering space.
- CleanCoat® nanotechnology helps prevent bacteria, mildew and water stains on your glass, making it easy to clean and looking new.
- Out-of-plumb adjustability for simpler installation.
- Can be installed to open to the left or right.
- Maximum width adjustability.

### Installation

- Pivot shower door.
- Not for use in hospitality.
- For residential use only.

### Included Components

Additional Components:  
Hardware kit



### Codes/Standards

ANSI Z97.1  
CPSC 16CFR 1201

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color | Code | Description |
|-------|------|-------------|
|       | SHP  |             |
|       | ABZ  |             |
|       | BNK  |             |

### Available Glass Options

| Code | Description   |
|------|---------------|
| L    | Crystal Clear |

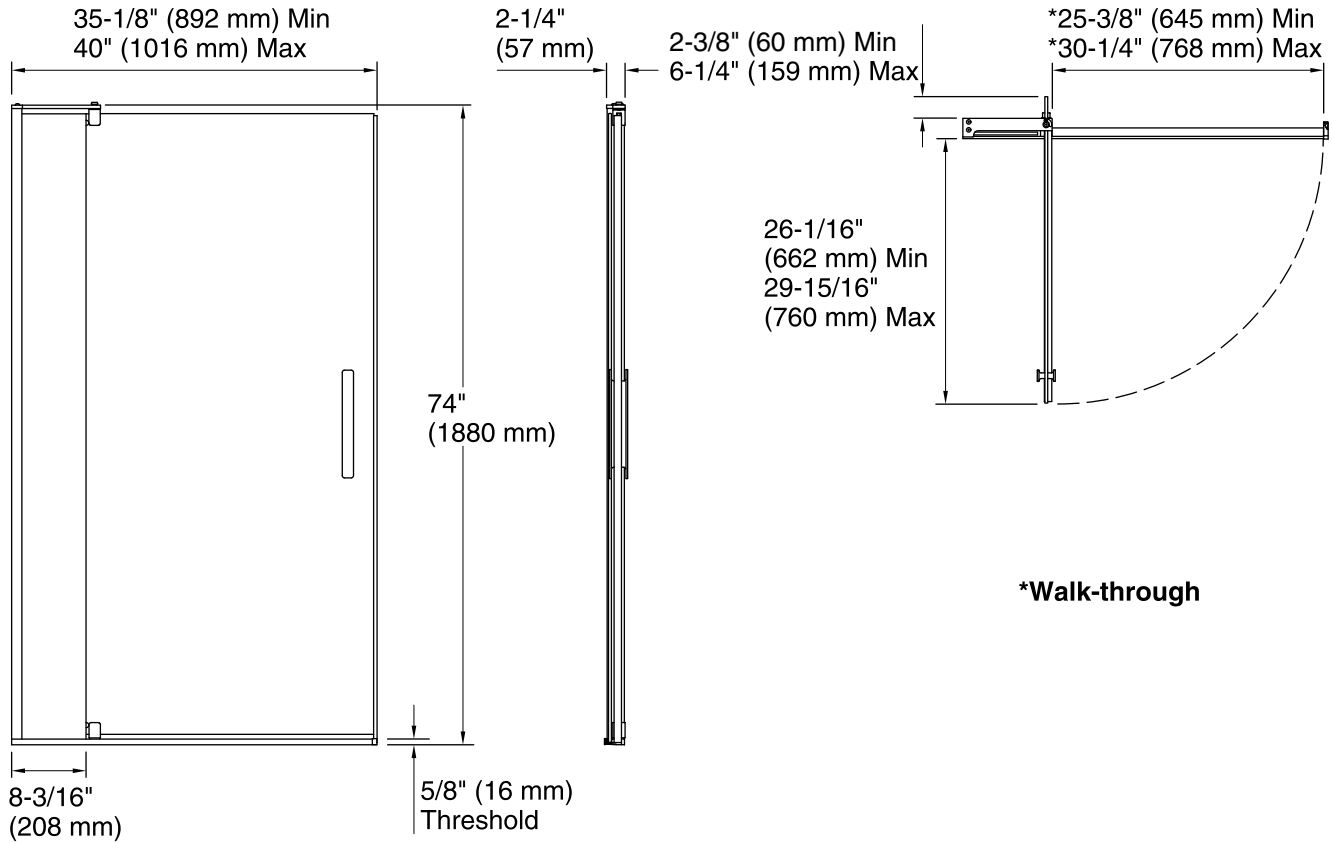

**\*Walk-through**

### Technical Information

All product dimensions are nominal.

|                      |                              |
|----------------------|------------------------------|
| Installation type:   | For shower base installation |
| Opening style:       | Pivot                        |
| Opening Width - Min: | 35-1/8" (892 mm)             |
| Opening Width - Max: | 40" (1016 mm)                |
| Walk-through - Min:  | 25-3/8" (645 mm)             |
| Walk-through - Max:  | 30-1/4" (768 mm)             |
| Glass thickness:     | 5/16" (8 mm)                 |
| Glass coating:       | CleanCoat®                   |

### Notes

Install this product according to the installation guide.

Strike jamb is made of clear plastic and may not cover existing shower door holes.

**NOTICE:** The vertical opening should be a minimum of 78" (2032 mm) to allow clearance for installation.