
shown in Brushed Bronze with Brushed Bronze blades and optional metal cover

ATLAS

COASTAL WET LOCATION 100% 316 MARINE GRADE STAINLESS STEEL Donaire

Designed in 2015

With teardrop motor housing, the 52" Donaire 316 marine grade stainless steel coastal wet location ceiling fan is transitional in design. Donaire is finished in brushed bronze, brushed stainless, or gloss white, equipped with all weather blades and 16W LED dimmable light kit with optional metal cover. Constructed of entirely 316 marine grade stainless steel, the Donaire carries a limited lifetime warranty.

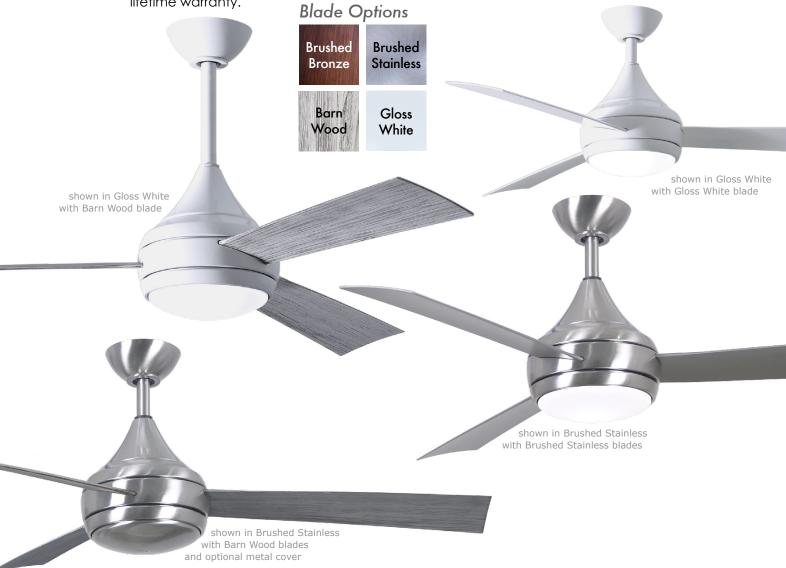

SKU NAMING CONVENTION					
SKU#	DA-XX-XX (Model+Finish+Blade)				
Standard Finishes	Brushed Bronze Brushed Stainless Gloss White	- BB - BS - WH			
Blade Finish	Barn Wood Tone Brushed Bronze Brushed Stainless Gloss White	- BW - BB - BS - WH			

STANDARD EQUIPMENTOne downrod of 10 inches / 13 cmVaulted ceiling canopy for up to 29°Light cover3-speed RF
remote control
in blackDecora-style, 3-speed,
non-dimmable
wall controlImage: Control of the state of the sta





CEILING HEIGHT / DOWNROD TABLE				
Ceiling Height	Downrod Lengths Field cuttable. Non-threaded			
10 ft or less	5 inches / 13 cm			
10 -12 feet	10 inches / 25 cm			
13 feet	20 inches / 51 cm			
14 feet	30 inches / 76 cm			
15 feet	48 inches / 122 cm			
16 feet +	72 inches / 183 cm			

CEILING PITCH TABLE				
0/12	0 degrees			
1/12	4.76 degrees			
2/12	9.46 degrees			
3/12	14.04 degrees			
4/12	18.43 degrees			
5/12	22.62 degrees			
6/12	26.57 degrees			
7/12	30.26 degrees			
8/12	33.69 degrees			
9/12	36.87 degrees			
10/12	39.81 degrees			
11/12	42.51 degrees			

Matthews Fan Company 1881 Industrial Drive Libertyville, IL 60048 Tele: 847.680.9043 Fax: 847.680.8140 www.matthewsfanco.com © 2019 Matthews Fan Company. All rights reserved.

Donaire

6.5" / 17 cm 6.5" / 13 cm 6.5" / 13 cm

TECHNICAL SPECIFICATIONS

FAN SPECIFICATIONS									
Fan	Diameter	52 inches / 132 cm							
Ove	erall Drop	8.5 inches / 22 cm + downrod length							
Fc	an Weight	29 lbs							
	Voltage	110 or 220							
M	otor Type	AC							
Downroc Field cuttable. Non	ds Lengths a-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76,122,183							
Downrod	Diameter	1 inch							
Env	vironment	Coastal and wet locations All weather blade system							
A	mbience	Silent							
Safety Ce	ertification	UL / CUL							
	Warranty	Limited Lifetime							
NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA									
RPM (Low / High)		55 / 172							
CFM (Low / High		1775 / 6013							
Watts (High)		58.62							
CFM/Watt (High)		102.57							
Blo	ade Pitch	14°							
LIGHT KIT PHOTOMETRICS									
Lamping (Replaceable)	Remote Dimmable	Delivered Temperature in K	Delivered Lumens	CRI	Watts	Hours			
Integrated LED	Yes	3017	725	90	16	60,000			
	Light kit longevity if used 6 Hours/Day: 27.4								

