

1.75 GPM

## SHOWER HEAD

■ 8-Spray Setting Shower head

### FEATURES:

- Touch-Clean® Nozzles


### STANDARD SPECIFICATIONS:

- Maximum flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa.
- ABS shower head with eight settings - not a positive shut-off.
- Standard 1/2" pipe fitting.
- Easy-turn spray dial.

### WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

### Spray Pattern

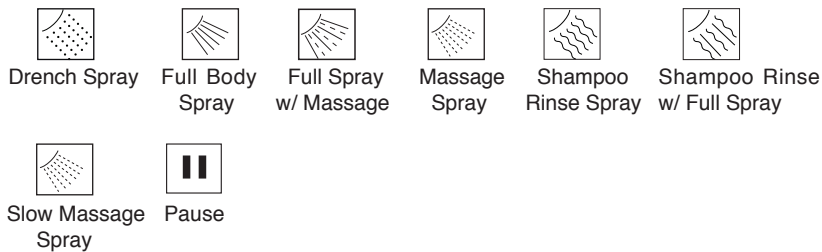

### COMPLIES WITH

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®

▲ Designate proper finish suffix