

One-Light Close-To-Ceiling

 Ceiling ctc mounted • Damp location listed **PROGRESS LED**


P3408-0930K9

Description:

One-light LED Flush Mount with a white glass diffuser and replaceable LED Module in a Brushed Nickel finish.

Specifications:

- Brushed Nickel (-09) (plated)
- Steel Construction
- White glass shade
- Replaceable LED module.
- 1,211 lumens 71.2 lumens/watt per module (source)
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Ceiling pan covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified

Performance:

Number of Modules	1
Input Power	17w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1211/71.2 (LM-82)
Lumens/LPW (Delivered)	954/59.3 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Damp location listed ENERGY STAR® qualified

Images:



Dimensions:

Diameter: 7-1/2"
Height: 4-11/16"

Glass
Width: 7-1/2"

Photometrics:


P3408-0930K9

ELECTRICAL DATA	P3408-0930K9
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.142 A
Input Power	17
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*

*See Dimming Notes for more information

P3408-0930K9

LED Light Engine: 3000 K 90 CRI
 System Wattage: 17
 Fixture delivered lumens: 954
 Fixture Efficacy: 59.3
 Spacing Criteria: 1.4 | 1.4 | 1.2

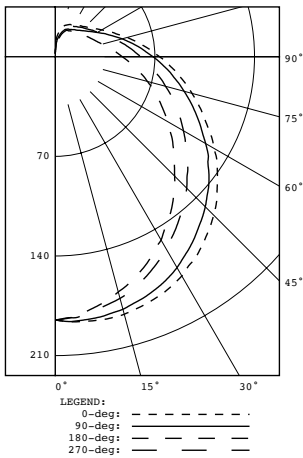

CANDELA DISTRIBUTION

CANDELA	DISTRIBUTION				FLUX
	0.0	90.0	180.0	270.0	
0	185	185	185	185	
5	187	186	182	184	18
15	187	184	171	176	51
25	182	177	157	164	78
35	172	164	139	148	98
45	157	149	119	131	107
55	139	131	100	112	108
65	119	112	83	96	102
75	100	94	67	80	90
85	82	77	53	66	76
90	73	69	47	60	
95	66	61	42	55	61
105	52	49	34	45	48
115	42	38	29	38	37
125	34	31	26	32	28
135	30	26	24	29	21
145	27	23	22	26	15
155	25	22	20	24	10
165	22	18	16	20	5
175	14	10	6	11	1
180	2	2	2	2	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	147	15.4
0-40	244	25.6
0-60	460	48.2
0-90	727	76.3
90-120	145	15.2
90-130	173	18.2
90-150	209	22.0
90-180	226	23.7
0-180	954	100.0

Test 15.00487 Test Date 03/26/15

P3408-0930K9

Dimming Notes:

P3408 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Nova T NTELV-300

Lutron Vienti VTELV-600

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Leviton Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.