

ONE-LIGHT FLUSH MOUNT

 Ceiling mounted • Damp location listed **PROGRESS LED**


P350056-009-30

Description:

A 16" domed, linen finish glass diffuser is discreetly supported from Brushed Nickel metal fittings and encloses an energy-efficient light source. 1,200 lumens 90+ CRI, 3000K.

Specifications:

- Brushed Nickel (-009) (plated)
- Steel Construction
- Etched White Linen glass diffuser
- Design features a domed, linen finish glass diffuser.
- Diffuser is discreetly supported from metal fittings encloses an energy-efficient light source.
- 1250 delivered lumens 52 lumens/watt (source)
- 3000K color temperature, 90+ CRI.
- This fixture is not dimmable.
- Ceiling pan covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- ENERGY STAR® qualified

Performance:

Number of Modules	1
Input Power	24w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1250/52 (LM-82)
Lumens/LPW (Delivered)	1144/48.9 (LM-79)
CCT	3000 K
CRI	90+
Life (hours)	(L70/TM-21)
FCC	FCC Title 47, Part 15, Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cETLus Damp location listed ENERGY STAR® qualified

Images:



Dimensions:

Diameter: 16"
Height: 4-1/2"

Glass
Width: 15-11/16"
Height: 3-1/16"

Photometrics:


P350056-009-30

ELECTRICAL DATA	P350056-009-30
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.198 A
Input Power	24
Power Factor	
THD	<20%
FCC	FCC Title 47, Part 15, Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*

*See Dimming Notes for more information

P350056-009-30

LED Light Engine: 3000 K 90+
 System Wattage: 24
 Fixture delivered lumens: 1144
 Fixture Efficacy: 48.9
 Spacing Criteria: 1.28

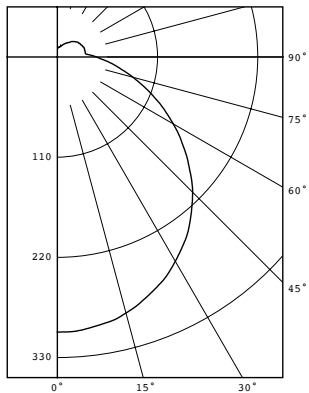

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	302	
5	301	29
15	291	82
25	272	125
35	245	153
45	210	162
55	168	151
65	126	125
75	86	91
85	55	60
90	43	
95	33	38
105	31	33
115	30	30
125	28	25
135	24	19
145	19	12
155	15	7
165	12	3
175	10	1
180	10	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	236	20.6
0-40	389	34.0
0-60	702	61.3
0-90	977	85.4
90-120	100	8.8
90-130	125	10.9
90-150	156	13.6
90-180	167	14.6
0-180	1144	100.0

Test 17.00222 Test Date 01/24/17