

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Step Light with Photocell

Model & Voltage	Color Temp & CRI	Lumens	Finish
WL-LED202 120 VAC	3000K 90 Amber	65 65	BK Black on Aluminum BN Brush Nickel on Aluminum BZ Bronze on Aluminum SS Stainless Steel WT White on Aluminum

Example: **WL-LED202-30-BK**

### FEATURES


- Options in die-cast brass or 316 marine-grade stainless steel
- Fits into 2"x4" J-Box with minimum inside dimensions of 3"x2"x2"
- No driver needed
- No heat radiation
- Low profile, flush to wall aesthetics with no visible hardware
- Balanced lighting, free of shadows with minimum glare
- Integrated photocell for energy saving
- Driver concealed within the fixture
- 5 Year warranty



### SPECIFICATIONS

<b>Construction:</b>	Corrosion resistant aluminum alloy, Stainless Steel
<b>Power:</b>	2W
<b>Input:</b>	120 VAC, 50/60Hz
<b>Light Source:</b>	Integrated LED 3 Step Mac Adam Ellipse
<b>Lens:</b>	Tempered Glass
<b>Rated Life:</b>	54000 Hours
<b>Finish:</b>	Enamel Coated:Black on Aluminum, Enamel Coated::Brush Nickel on Aluminum, Enamel Coated:::Bronze on Aluminum, Enamel Coated:::Stainless Steel, Enamel Coated::::White on Aluminum
<b>Operating Temp:</b>	-40°F to 122°F (-40°C to 50°C)
<b>Standards:</b>	ETL, cETL, Wet Location Listed, IP66, ADA

### FINISHES:

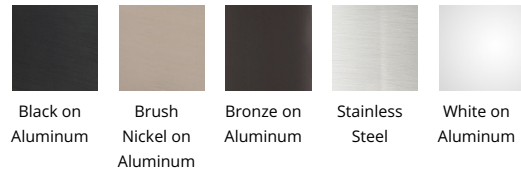

### LINE DRAWING:

