

Installation manual for:

7925G43C,7925G43C-GT,7925G43G
7925G43GT-GT,7925G43SS-SS
RC/EC/SA/SS

Dimensions: D43"H68"L25

Collection: Verona

Bulb Type : E11 bulb not included


Weight : 80 LBS



Thank you for choosing world famous brand chandelier. We are providing the finest quality crystal chandelier for our customers. Our master designers and craftsmen intend to give a professional insight on lighting design & product quality. Prompt and efficient services are our priority. We enclosed detail instructions on how to install your chandelier properly. Please read all instructions carefully & thoroughly. If you have any questions, our professional customer service team committed provided all the information of our products, please call our toll free

CHANDELIER HOTLINE AT:

1-888-388-3390



SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF BY EITHER REMOVING THE FUSE OR TURN OFF THE CIRCUIT BREAKER.


CAUTION

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit : 110 - 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions, please call our Customer Service department at 1-888-388-3390. Please have model number (at the front page), where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

Step 1 Frame Assembly Diagram

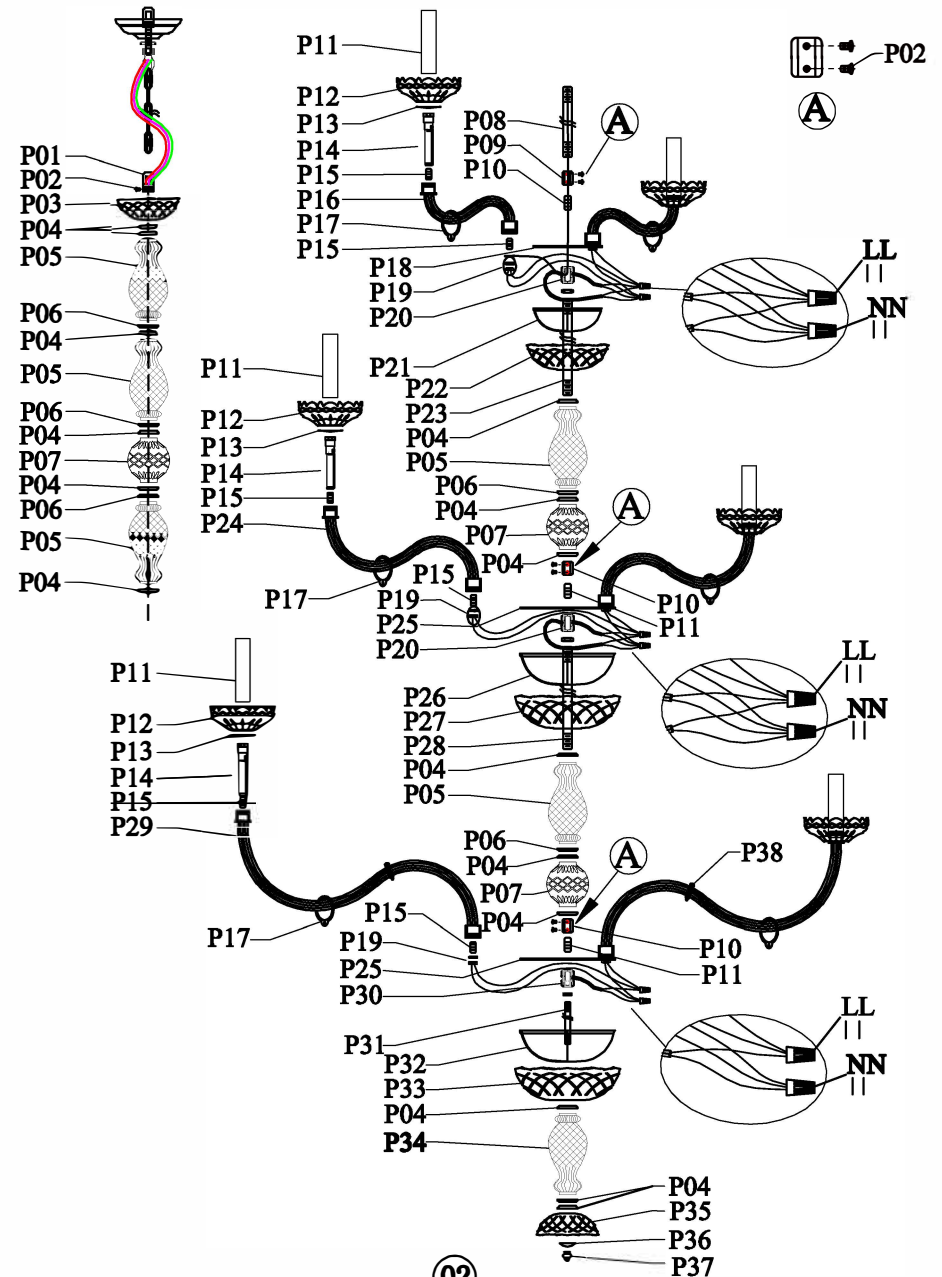
























7925G43 D43"H68"L25
























Please use the partslist to ensure you are not missing any parts.

7925G43

PARTS LIST

Part#	Picture	Description	Qty	Check list
ZA		ø5.3" Canopy	1	
ZB		4" Crossbar	1	
ZC		Canopy ring	1	
ZD		Canopy lock	1	
ZE		L59" Chain 05P Plain Design	1	
ZF		Power Cord 14.4'/SPT-2-16# Clear/Gold	1	
P01		loop	1	
P02		Ground Screw	13	
P03		ø4.7" Glass dish	1	
P04		big pipe cover	11	
P05		Glass column	5	
P06		big pipe cover	5	
P07		Glass column	3	
P08		Both end threaded pipe	1	
P09		Metal finial	3	
P10		Nipple	3	
P11		L4.13" Metal tube	25	
P12		ø4.7" Glass dish	25	
P13		Crystal Drop Holder	25	
P14		Socket	25	
P15		Nipple	50	
P16		Glass S-shape Arm	5	
P17		Glass ring	25	

7925G43 D43"H68"L25


Part#	Picture	Description	Qty	Check list
P18		ø5.1" Around metal plate	1	
P19		Hex nut	27	
P20		Hickey	2	
P21		Receiver bowl	1	
P22		ø5.9" Glass dish	1	
P23		Both end threaded pipe	1	
P24		Glass S-shape Arm	10	
P25		ø7.1" Around metal plate	2	
P26		Receiver bowl	1	
P27		ø7.9" Glass dish	1	
P28		Both end threaded pipe	1	
P29		Glass S-shape Arm	10	
P30		Hickey	1	
P31		Both end threaded pipe	1	
P32		Receiver bowl	1	
P33		ø7.9" Glass dish	1	
P34		Glass column	1	
P35		ø4.7" Glass dish	1	
P36		Small flying saucer	1	
P37		Bottom lock	1	
P38		6.5mm Crystals	10	
A		1050-14#*8+911-3"	5	
B		1050-14#*31 +2024-14#*1 +1050-14#*16*2	5	

7925G43 D43"H68"L25

Part#	Picture	Description	Qty	Check list
C		1050-14#*1+872-2"	125	
D		1050-14#*3+872-3"	5	
E		1050-14#*4+872-3"	5	
F		1050-14#*4+872-3"	10	
G		1050-14#*6+872-3"	10	
H		1050-14#*5+872-3"	5	
I		2024-14#*1+1050-14#*7+872-3"	10	
J		2024-14#*1+1050-14#*1+872-3"	10	
K		1050-14#*12+872-3"	10	
L		1050-14#*10+872-3"	5	
M		1050-14#*2+872-3"	5	
N		1050-14#*7+872-3"	1	
O		1050-14#*8*2 +2024-14#*1 +1050-14#*1 +872-3"	10	
P		1050-14#*5*2 +2024-14#*1 +1050-14#*1 +872-3"	10	

7925G43 D43"H68"L25

Step 2
Canopy Installation Instruction

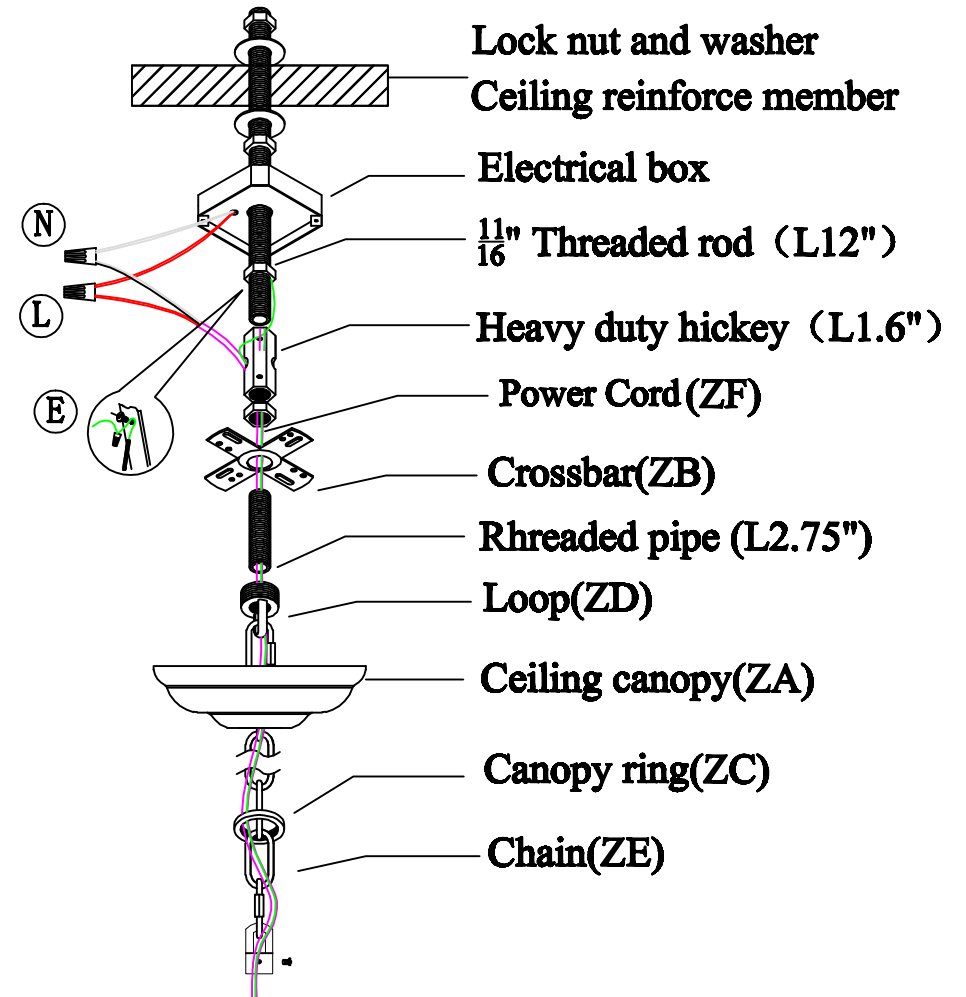

"L" = Hot wite
"N" = Neutral wite
"E" = Ground wite

7925G43 D43"H68"L25

IMPORTANT: Test sockets with bulb before dressing the fixture.


1. Drill a $\varnothing 0.7$ " hole in the ceiling reinforcement to allow a $\frac{11}{16}$ " threaded rod to pass through.
2. Attach the electrical box to the ceiling reinforcement and pass the $\frac{11}{16}$ " threaded rod through the box and secure it to the heavy duty hickey .
3. Pass the fixture wires and ground wire through the loop, canopy ring, center hole of canopy and the heavy duty hickey.
4. Pull ceiling wires down through the fixture box and make connection.
5. Screw loop only onto threaded pipe.
6. Hang the fixture on chain.
7. Secure the canopy with canopy ring

07

7925G43 D43"H68"L25

Step 3

Frame Assembly Diagram

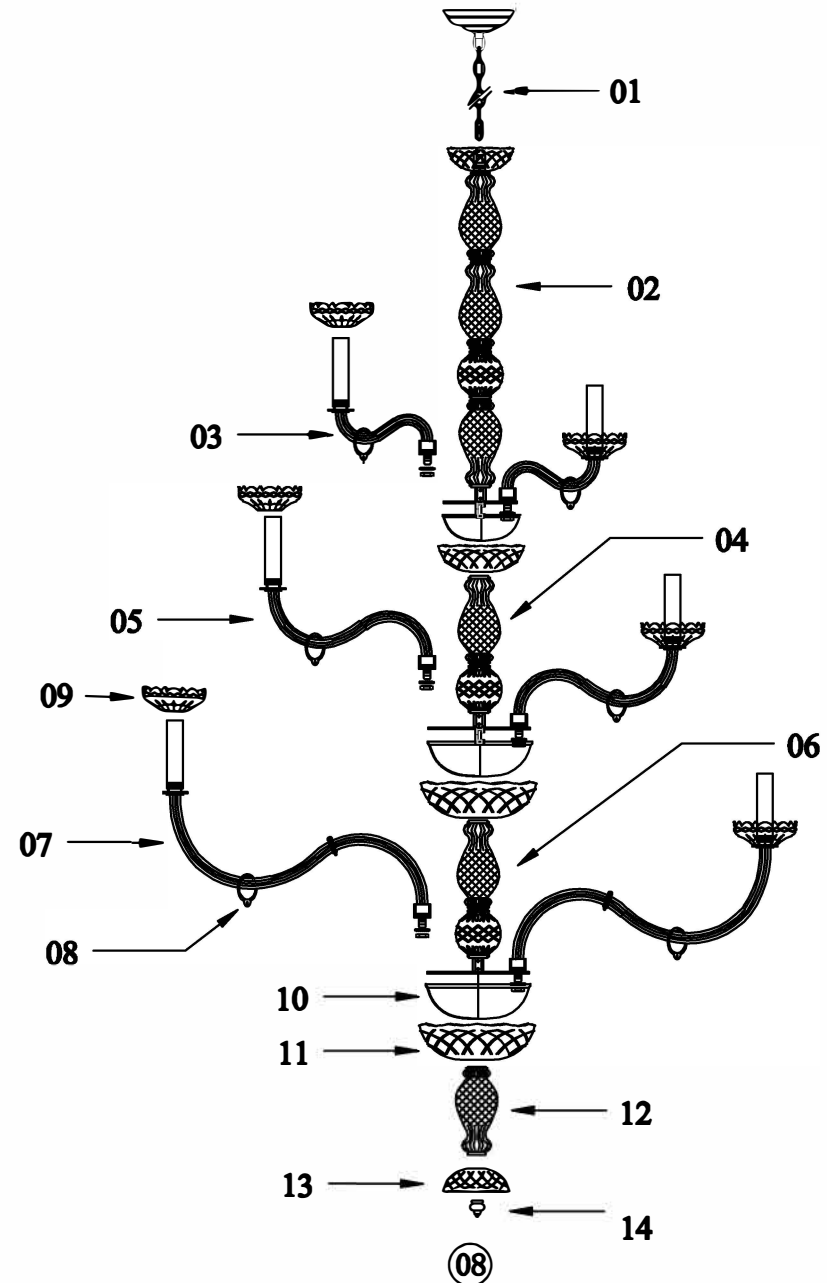

Frame Assembly Instructions

Installation:

Please read all instructions carefully. Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete. Please note that each part has been assigned a number. Please proceed in a numerical order.

1. Hang the chain (01) on the ceiling.
2. Hang the lamp body (02) on the chain (01).
3. Break up the lamp body (02) and assemble the glass arm (03) to the lamp body (02) then assemble the lamp body (02).
4. Hang the lamp body (04) on the chain (02).
5. Break up the lamp body (04) and assemble the glass arm (05) to the lamp body (04) then assemble the lamp body (04).
6. Hang the lamp body (06) on the chain (04).
5. Break up the lamp body (06) and assemble the glass arm (07) to the lamp body (06) then assemble the lamp body (06).
7. Put the glass ring (08) and glass dish (09) on the glass arm .
7. Hang (10)/(11)/(12)/(13)/(14) on the lamp body (06) .
8. Hang up the crystal in accordance with the Crystal Dressing Diagram.
9. Hang crystal "A" , "B" , "C" , "D" , "E" , "F" , "G" , "H" , "I" , "J" , "K" , "L" , "M" , "N" , "O" , "P" Connect both ends of "O" with "I" , Connect both ends of "P" with "J" .


The end !

Step 4

Crystal Dressing Diagram



When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

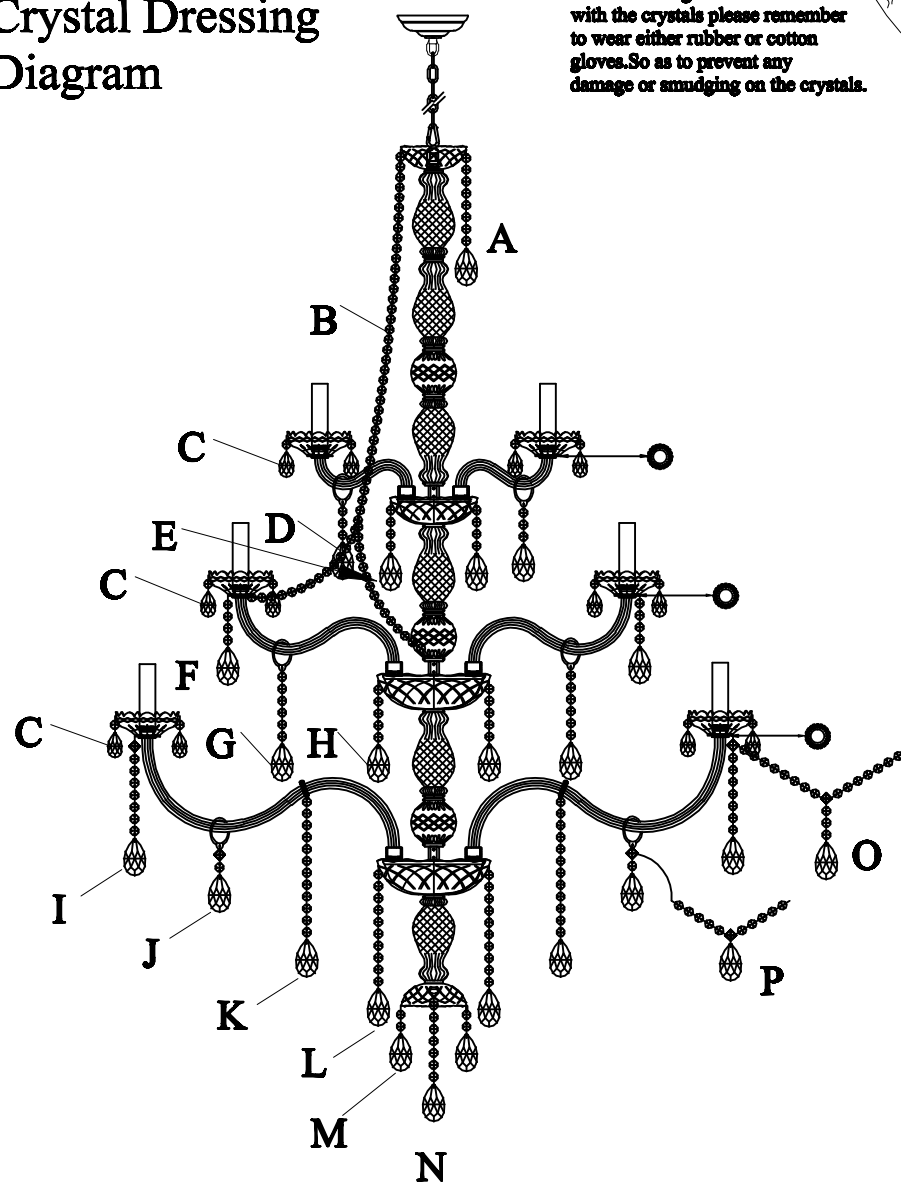

Congratulations !

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

If you require any additional assistance, please contact us at 1-888-388-3390.

Thank you.

Cleaning and Maintenance of Chandelier Frame

The finish on our chandelier frames and fixture frames is protected by a durable coating of lacquer. To clean, use a clean soft, dry cloth. Do not use any metal polishes, cleaners, abrasives or any substance which could remove the protective finish. Failure to follow these instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals

Wet a chamois in clean warm water and wipe gently, then polish with a dry chamois.

To Order Crystal Replacement Parts

Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased or contact us at the address shown on the reverse side. For ease of ordering, you may use the original crystal trimming instructions provided with this product and circle the items you wish to order, indicating the quantity by writing the number needed adjacent to the circle and faxing it to our customer service department at 215-423-8882. You will be contacted with prices prior to shipment. All orders must be pre-paid.

7925G43 D43"H68"L25

Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture warranted for a period of two (2) years from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department at the address and phone number shown below. A written return authorization form will be sent to you with specific instructions.

CUSTOMER SERVICE DEPARTMENT

**500-550 E. Erie Avenue
Philadelphia, PA 19134**

Tel : 215-423-8880

Fax : 215-423-8882

7925G43 D43"H68"L25

Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department at the address on the reverse side. Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reserved the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warranty, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.