

**SAFETY INFORMATION**

Released Date: 2020-11-05

Please read and understand this entire manual before attempting to assemble, install or operate the product.


**WARNING**

- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.
- RISK OF FIRE - Use bulbs specified by the markings and/or labels on the fixture.

**CAUTION**

- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.
- Turn off electricity to fixture before replacing the bulb(s).

**TOOLS REQUIRED**

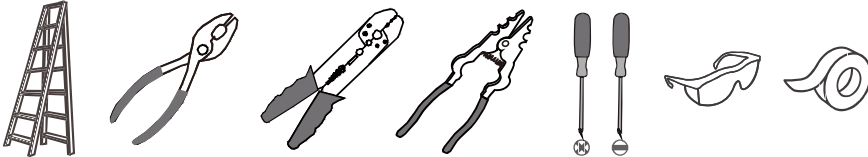


**CARE AND MAINTENANCE**


- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.

If you need further assistance call Quoizel Customer Care at 1-800-645-3184 (9:00am – 5:00pm EST), or visit us on-line at [www.quoizel.com](http://www.quoizel.com).

**PACKAGE CONTENTS**

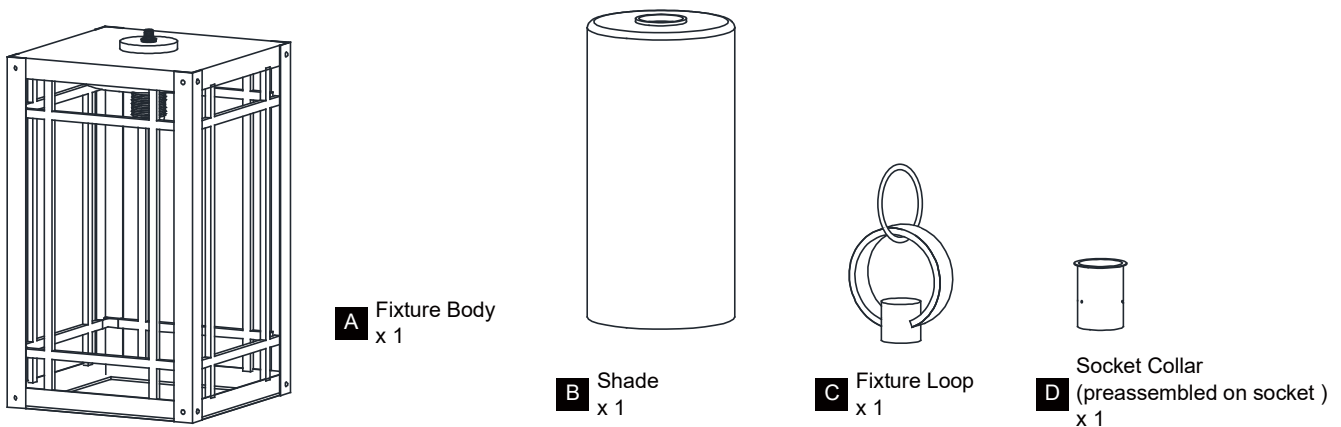

**MOUNTING HARDWARE**

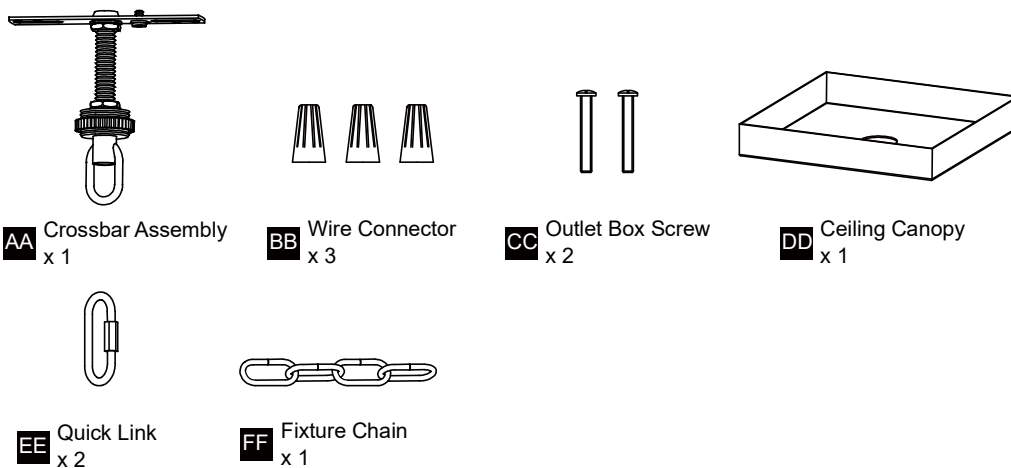

# INSTALLATION

**1 Install Fixture Loop & Shade**

The diagram shows a rectangular metal fixture housing with vertical bars. A circular fixture loop is being lowered into the top of the housing. A cylindrical shade is shown being pushed up into the top of the housing. Arrows indicate the direction of assembly.

**2 Install Crossbar Assembly**

The diagram shows an outlet box being attached to a crossbar assembly. The crossbar assembly is then attached to a canopy lock ring. Arrows indicate the direction of assembly.

**3 Install Fixture Chain**

The diagram shows a chain being attached to a ceiling canopy and a canopy lock ring. The chain is then attached to the fixture housing. A note indicates that the ceiling canopy shape varies depending on items purchased.

**OPTIONAL:** Adjust Chain as desired, using pliers and soft cloth (neither included) to remove extra links.

**4 Pull Supply Wires**

The diagram shows the supply wires being pulled through the chain alternate links. The wires are shown entering the fixture housing from the ceiling canopy.

Pull the supply wires with ground wire through the chain alternate links.

**5 Wiring**

The diagram shows the wiring connections for the fixture. It includes a white wire from the supply connected to the ribbed side of the wire from the fixture (labeled "N"). A black (or red) wire from the supply is connected to the smooth side of the wire from the fixture (labeled "L"). A ground wire from the supply is connected to the ground wire from the fixture (labeled "G") and a green ground screw.

**6 Install Ceiling Canopy**

The diagram shows the ceiling canopy being attached to the crossbar assembly. A note indicates that the ceiling canopy shape varies depending on items purchased.

\* Ceiling Canopy shape is varies depends on items purchased.

**7 Install Bulb**

Install one correct bulb referring to fixture markings and/or labels for maximum wattage.

**Recommended Bulb type (not included):**

The diagram shows a recommended bulb type with a medium (E26) base and a Type A shape. The bulb is labeled "100W MAX".

BULB BASE TYPE: Medium (E26)  
BULB SHAPE: TYPE A

Your installation is now complete! Restore electricity and save this sheet for future reference.