
LINEAR PATH LIGHT

6401



LANDSCAPE LIGHTING

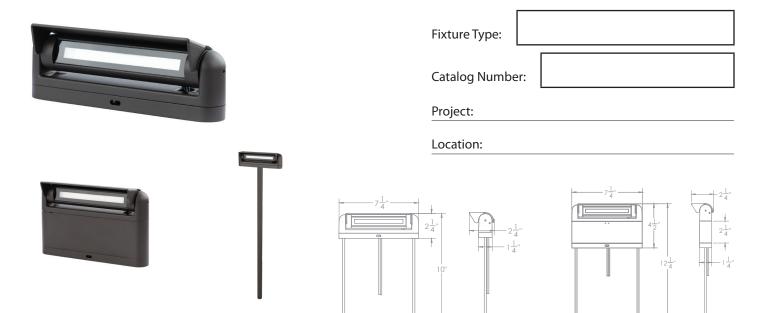

PRODUCT DESCRIPTION

WAC's Linear Path Light is a versatile and powerful LED solution for accenting or grazing: walls, paths and your landscape. An adjustable Anti-Glare Shroud lets you shield your light to avoid harsh visual glare and for more beam control.

FEATURES

- Low profile and discreet
- 180° fully rotatable fixture aiming
- Wide Flood Beam 110° x 80°
- · Adjustable anti-glare shroud
- Good for soft ground, wood floor, and concrete
- Base mount, riser mount & extension mount
- Path & Accent applications
- 10' lead wire and direct burial gel filled wire nuts included
- Maintains constant lumen output against voltage drop
- UL 1838 Listed
- MLV dimmable with remote MLV dimmers

ORDERING NUMBER

	Color Temp		Finish	
6401	27 30	2700K 3000K	BZ	Bronze on Aluminum

6401-

Example: 6401-30BZ

SPECIFICATIONS

Input: 9 - 15VAC (Transformer is required)

Power: 6W / 8.6VA
Brightness: 190 lm
Beam Angle: 110° to 80°
CRI: 85

Rated Life: 60,000 hours

waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050 Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122 **Western Distribution Center** 1750 Archibald Avenue Ontario, CA 91760

LINEAR PATH LIGHT

6401



Accessories

Additional Stake	9000-ST9-BZ		Bronze	Durable PVC stake
Extension Rods	5000-X04-BZ 5000-X04-BK 5000-X08-BZ 5000-X08-BK 5000-X12-BZ 5000-X12-BK	4 in 4 in 8 in 8 in 12in 12 in	Bronze	Extends distance between Accent light and Surface Mount Canopy, Stake, or Tree Mount box

Magnetic Transformers

Stainless Steel, 12-15V output, IP65 rated, UL 1838 listed See transformer spec sheet for details and its accessories

9075-TRN-SS *75W Max*

9150-TRN-SS *150W Max*

9300-TRN-SS *300W Max*

9600-TRN-SS 600W Max

