

## AIRFUSION TYPE A LED LIGHT KIT

SKU#21101201, 21101301, 21101401, 21101501

Rated Voltage 120V~ 60Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before using the product. Please keep instructions for future reference.

### Warranty

- This fitting is covered by a 2 year warranty from the date of purchase. Please retain proof of purchase.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

### Installation requirements

- Must be installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules.
- Select a suitable location for installation:
  - This product is suitable for indoor use only.
  - This product is suitable for dry locations only.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF.

### Installation directions

1. Remove all packaging material from the product.
2. Remove the bottom cover from the body of the fan.
3. Remove the light kit bracket (A) from the lamp body (B).
4. Install the light kit bracket (A) to the fan light bracket (C) by tightening the 3 screws provided (D).
5. Pull the Live (L, Blue) and Neutral (N, white) light wires (E) out from the fan body carefully. And remove the shrinkable sleeve from the light wires.
6. Connect the Live light wire (L, Blue) from fan body to Live wire (L, Black) of the light kit by tightening the wire nut (F), make sure there are no loose wire strands or connections.
7. Connect the Neutral light wire (N, White) from fan body to Neutral wire (N, White) of the light kit by tightening the wire nut (F), make sure there are no loose wire strands or connections.
8. Attach the lamp body (B) to the light kit bracket (A) and secure by turning it clockwise.


**WARNING:** To avoid possible electrical shock, be sure you have turned off the power at the main circuit panel.

For customer support, please contact:

Tel: +1 (949) 800 8488

Email: [support@beaconlighting.us](mailto:support@beaconlighting.us)

[www.beaconlighting.us](http://www.beaconlighting.us).

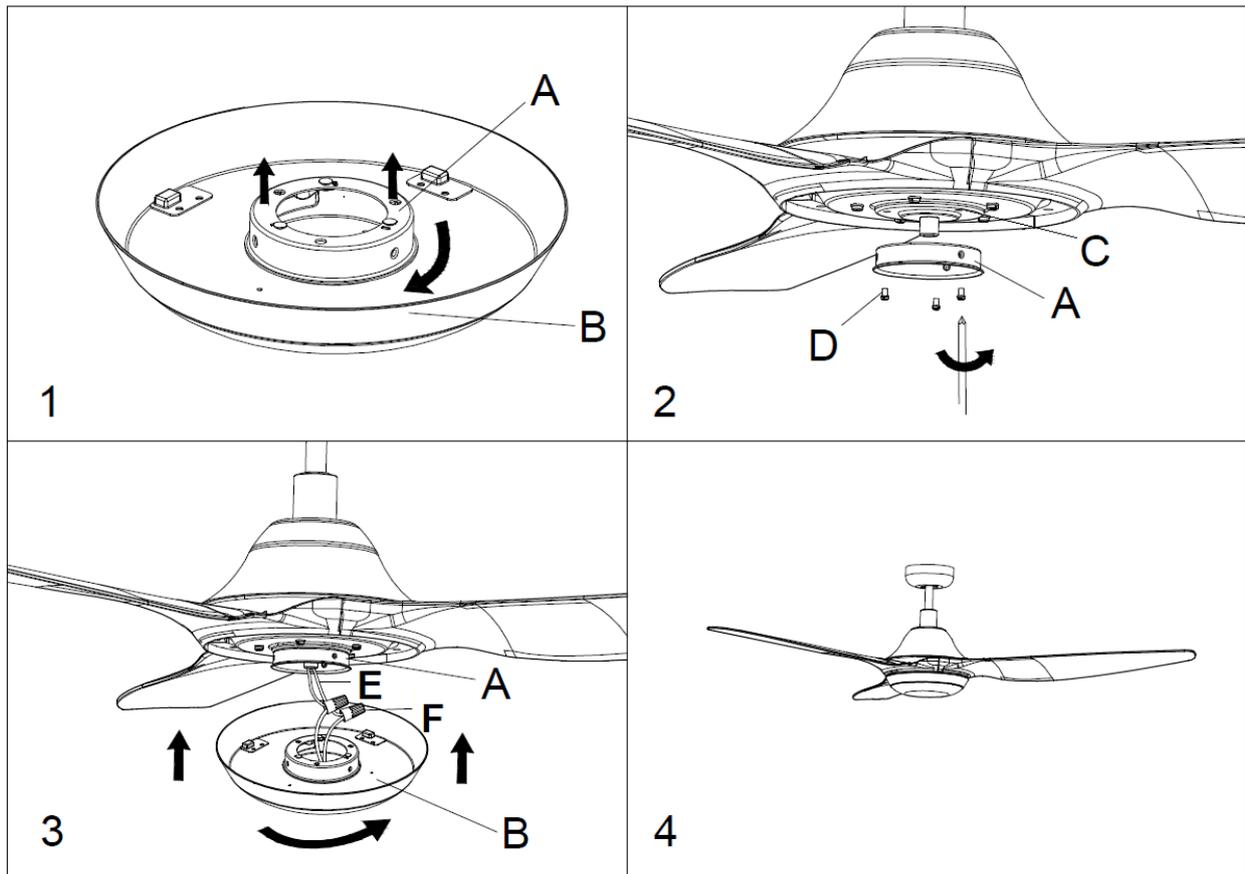

### Safety tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning or adjustment to the fitting.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Ensure that the fitting does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a damp clean cloth. Never soak the fitting with water.

### Specifications

SKU #	21101201	21101301	21101401	21101501
Color	Brushed Chrome	White	Dark Koa	Black
Rated Voltage	Rated Voltage 120V~ 60Hz			
Rated Wattage	18W			
LED Specs	3000K, 1000lm			
Weight	1.41 lb			
Dimensions	H:1.89 inch Dia:8.9 inch			

For customer support, please contact:

Tel: +1 (949) 800 8488

Email: [support@beaconlighting.us](mailto:support@beaconlighting.us)

[www.beaconlighting.us](http://www.beaconlighting.us)