



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Undercounter Motion Sensor LCX-OCC

Features

This sensor is an active motion detector. It emits high-frequency electromagnetic wave and receives their echo. A micro-process triggers the "ON" command. Detection is possible through doors, glass or thin walls. This sensor has individual –Reach, Time, and Light control settings that can be adjusted to your preferences. Easy plug in installation. On/Off Rocker switch. Use with AFX undercabinet models SPLE, NLLP and KNLU systems.

Construction

Mounting box is made from polycarbonate.

Finish

White polycarbonate.

Technical Specs

Power: 100-130VAC
 HF: 5.8GHz CW radar, ISM band
 Frequency: 60/60Hz
 Transmission power: <10mW
 Detection Angle: 360°
 Rated load: 600W
 Power Consumption: 0.9W (Approx)
 Time Setting: 10 Sec to 30 Min. Adjustable
 Light Control: 2-2000LUX Adjustable
 Reach Setting : 1-10m, Adjustable



Certification


cETLus listed for damp locations

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.


Specifications and dimensions

subject to change without notice.



Ordering Information:

White	H	W	D
LCX-OCC	1.26"	6.97"	3"

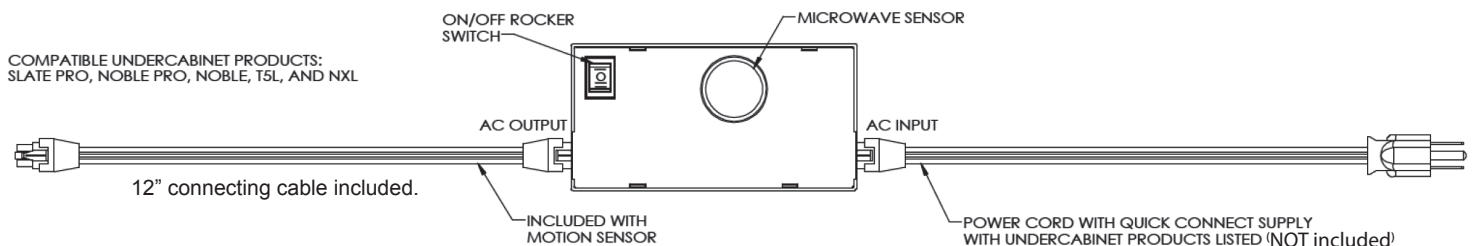

COMPATIBLE UNDERCABINET PRODUCTS:
 SLATE PRO, NOBLE PRO, NOBLE, TSL, AND NXL