


CAUTION – RISK OF SHOCK –



Disconnect Power at the main circuit breaker panel or main fuse box before starting and during the installation.

- 1) Rotate in the threaded pipe into the coupler and slide the tube, ring over the threaded pipe and next install the coupler on top of the ring by rotating clock wise.
- 2) Pass fixture electrical wire and ground wire through desired amount of stems D & E and screw together using supplied threaded nipples. **NOTE:** Use a drop of Thread compound (supplied) on the threads.
- 3) Take threaded pipe from parts bag and screw in screw collar loop a minimum of 6 mm (1/4"). Lock into place with hexnut.
- 4) Now screw threaded pipe into mounting strap using supplied screws. Mounting strap must be positioned with extruded thread faced into outlet box. Threaded pipe must protrude out the back of mounting strap. Connect mounting strap to outlet box.
- 5) Unscrew the threaded ring from screw collar loop. Take canopy and pass over screw collar loop. Approximately one half of the screw collar loop exterior threads should be exposed. Adjust screw collar loop by turning assembly up or down in mounting strap. Remove canopy.
- 6) After desired position is found, tighten top hexnut up against the bottom of the mounting strap.
- 7) Slip canopy over screw collar loop and thread on threaded ring. Attach chain (with fixture connected) to bottom of screw collar loop. Unscrew threaded ring, let canopy and threaded ring slip down.
- 8) Pass wire through threaded ring, canopy, screw collar loop, threaded pipe and into outlet box.
- 9) Make wire connections. Reference chart below for correct connections and wire accordingly.

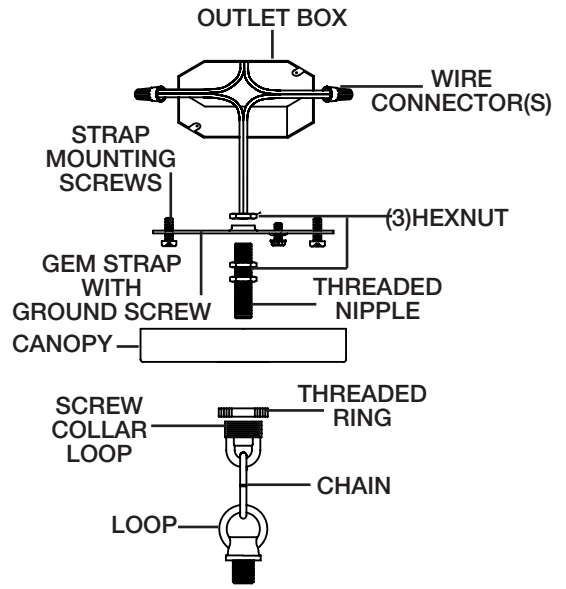

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



- 10) After all wire connections are made, slide the canopy back up to the ceiling and thread the threaded ring up to the canopy.
- 11) Place recommended bulbs (not supplied) into the sockets by rotating clockwise into place.

